



# Variable Freq. Alt. Tachometer



## Product Description

2-Inch Variable Frequency Alternator tachometer connects to the Alternator signal. The tachometer has four range selections for rough calibration and an adjustment potentiometer for fine adjustment.

The use of DIP switches on the back of this tachometer allows a rough calibration selection for the desired frequency.

This tachometer can be used in 24 VDC systems with the use of an adaptor that connects between the 24 VDC ignition system and the tachometer.

Faria Beede Instruments, Inc.  
P. O. Box 983  
Uncasville, CT 06382  
860.848.9271  
Fax: 860.848.2704

88 Village Street  
Penacook, NH 03303  
603.753.6362  
Toll-free: 800.451.8255  
Fax: 603.753.6201



Made in the USA

## Environmental Specifications

Shock (Non-operating):  
50 +/- 2 G and a half sine duration of 11 +/- 2 ms.  
per MIL-STD-202, Method 213

Vibration (Non-operating):  
4 G peak, 10 to 200Hz SAE J1455 Appendix A

Temperature:  
Operating, -20°C to 85°C  
Storage, -30°C to 85°C) 50% RH

Humidity:  
95% Relative humidity @110°F (43°C) non-condensing

Salt Spray:  
Meets or exceeds ASTM 117-73

## Electrical Specifications

Reverse Polarity Protection:  
Standard entire system

Load Dump:  
Meets SAE J1113, 3 positive 80V transients  
one minute intervals

Operating Voltage:  
11-16VDC standard

Over Voltage:  
18 VDC for 5 minutes with GY0065  
adapter 36 VDC for 5 minutes

## Mounting Hole:

2.0625" (53 mm)  
Depth behind face plate:  
3.266" (83 mm) min.

## Mechanical

Bezel Material:  
Stainless steel or aluminum  
Finish, customer specified

White thermoplastic copolymer

Opaque characters & background

Pointer:  
Contoured White

Lens:  
Flat Glass

## Operational:

Mounting Bracket:  
Metal

Clamping Range:  
0 - .8 in (0-20 mm)

Torque:  
5 to 7 inch pounds (.57 - 80 Nm.)



Signal Input:  
Alternator / Magnetic Pick Up

Min. Frequency:  
400 Hz

Max. Frequency:  
1600 Hz

Wire Termination  
Blade Terminals

# Dimensions

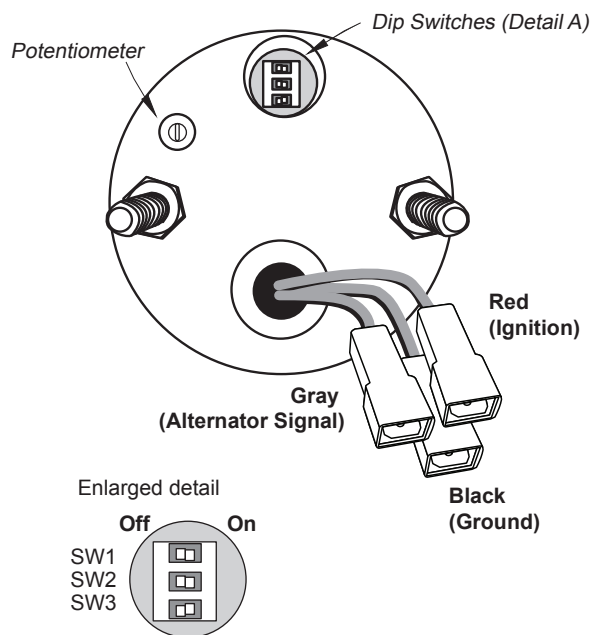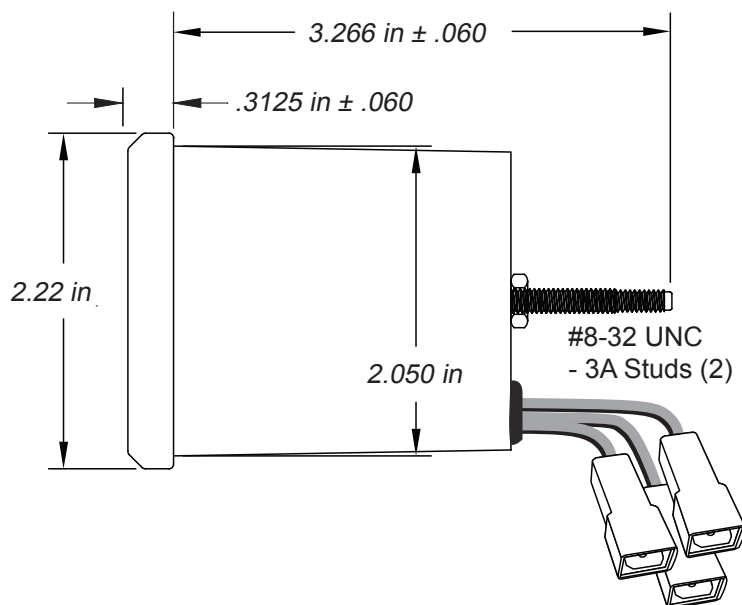

Rough Calibration Selection vs. Frequency

	400 Hz	800 Hz	1200 Hz	1600 Hz
SW1	OFF	ON	OFF	OFF
SW2	OFF	OFF	ON	OFF
SW3	OFF	OFF	OFF	ON