



J-1939 Tell-Tale Indicator with 16 Icon Positions

NexSysLink[®]
CAN Instruments Product Family
SAE J1939



Features and Benefits

- Environmentally sealed connectors
- Custom icon configurations available
- Up to six discrete inputs switched either high or low
- SAE J-1939 CAN protocol support
- Connects seamlessly with **NexSysLink** MNI instruments
- Bright LED illuminated tell-tales
- Built in audible alarm and switched output
- Factory configurable for +12V or +24V systems

This CAN based product complements the **NexSysLink[®]** instrument system by providing sixteen LED illuminated operator alert tell-tales along with an audible alarm to alert users to multiple fault conditions.

Product Description

The alert panel directly reads and processes SAE J-1939 compliant CAN messages, serial data from any NexSysLink Master Node Instrument and up to ten factory configurable discrete inputs switched either high or low to activate the tell-tales and/or audible alarm.

The product meets OBD regulatory requirements for wait-to-start lamp by performing required circuit continuity check.

A discrete output capable of switching up to one amp and an audible output increase the utility of this product.



Faria Beede Instruments, Inc.
P. O. Box 983
Uncasville, CT 06382
860.848.9271
Fax: 860.848.2704

88 Village Street
Penacook, NH 03303
603.753.6362
Toll-free: 800.451.8255
Fax: 603.753.6201

 Made in the USA

fm-001-0107 rev A 01/2015

www.FariaBeede.com

Protocol Compliance

Society of Automotive Engineers SAE J1939

Environmental Specifications

Shock (Non-operating):
 50G, 9-13mS half-sine,
 25 shocks in each of three orthogonal axes
 Vibration (Non-operating):
 0.06" (1.5mm) double amplitude 10-80-10 Hz
 2 hours in each of three orthogonal axes
 Temperature:
 Operating, -20°F to 158°F (-30°C to 70°C)
 Storage, -40°F to 185°F (-40°C to 85°C) 50% RH
 Humidity:
 95% relative humidity @110°F (43°C) non-condensing

Mounting Specifications

See diagram below for mounting pattern.
 Mounting hardware torque: 6 lb-in (0.68 N-m) max.

Electrical Specifications

Reverse Polarity Protection: Standard entire system
 Load Dump:
 Meets SAE J1113, 3 positive 80V transients
 one minute intervals
 Operating Voltage: 11-16VDC standard
 Over Voltage:
 Withstands 18V continuously for one hour
 Tell-tale illumination: LED


Connector Specifications

Mates with Deutsch I.P.D. DT series connectors.
 12 pin Connector: DT06-12SA, Locking wedge W12S
 16-20 AWG stranded copper wire recommended.

Mechanical

Case:
 Black thermoplastic copolymer
 Dial:
 Textured finish polymer
 Backlit dead-front alert icons
 Opaque background
 Sealing:
 IP 65 compliant


Wiring Connections



12 Pin Connector Detail
 Mates with Deutsch I.P.D.
 DT Series Connector
 DT-06-12SA
 Locking Wedge W12S

Connection Chart	
Pin Number	Connection Name
1	Switched Ignition (Key On)
2	System Ground
3	CAN-L
4	CAN-H
5	Serial Data
6	Relay Normally Open (Optional)
7	Switched Input 1 or Relay Common (Optional)
8	Switched Input 2
9	Switched Input 3
10	Switched Input 4
11	Switched Input 5
12	Switched Input 6

Product Outline Drawing

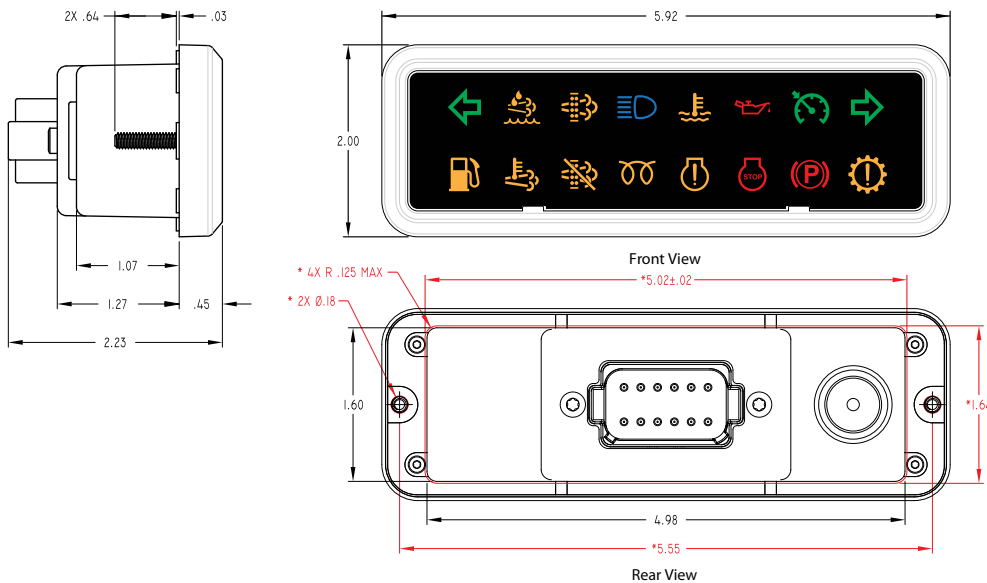

Notes:
 Recommended panel hole size
 outline and dimensions shown in red.
 Panel hole dimensions also
 delineated with an asterisk (*).

Dimensions shown are in inches.